MILLWORK & DISPLAY


Flexible linear lighting

LM-04

An 8 × 8 mm silicone profile for curved shelf details, with purpose-made clips and end caps.



Source product view

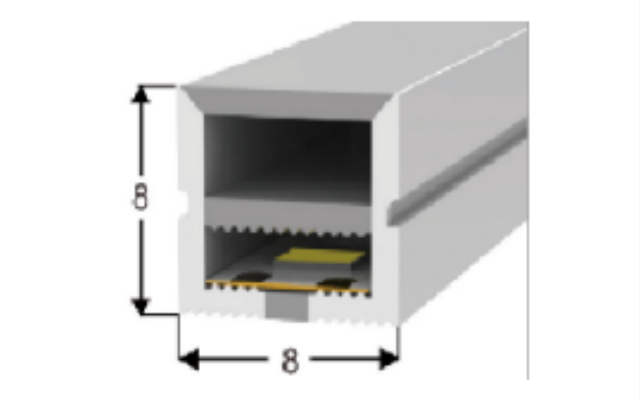

Detail from the same supplied schedule

Power	9.6 W/m
Supply	24 V DC; constant-voltage driver
Colour temperature	3500 K
Colour rendering / consistency	Ra ≥ 90 / < 3 SDCM
Beam	120°
Profile section	8 × 8 mm
Material / finish	Silicone / white
Mounting / bending	Recessed clips / front-bending
Luminaire protection	IP65
Control	On/off; non-dimmable

IP65 is the luminaire rating in the source. Driver and connection protection, cut lengths and bending radius must be confirmed for the final installation.

Source: supplied project luminaire schedule, pp. 10. Selected configuration.