
MILLWORK & DISPLAY


Angled shelf lighting

LM-02 / LM-A1 / LM-L3.45 / LM-L2.45

A compact black profile developed around the shelf detail and cable position.

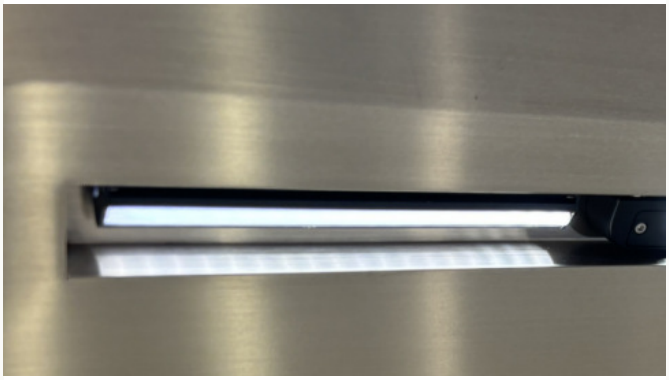

Source product view

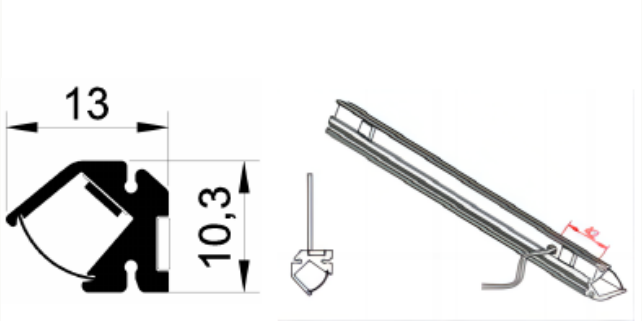

Detail from the same supplied schedule

Power	12 W/m
Supply	24 V DC; constant-voltage driver
Colour temperature	3500 K
Colour rendering / consistency	Ra ≥ 90 / < 3 SDCM
Beam	120°
Profile section	13 × 10.3 mm
Cable position	Side exit, 42 mm from the end
Material / finish	Aluminium / black
Mounting / protection	Magnetic / IP20
Control	On/off; non-dimmable

Codes above reproduce the source page header. The installation-area field has a code variation; confirm the selected order code and section before manufacture.

Source: supplied project luminaire schedule, pp. 8. Selected configuration.